




CLUTCH SELF ADJUST

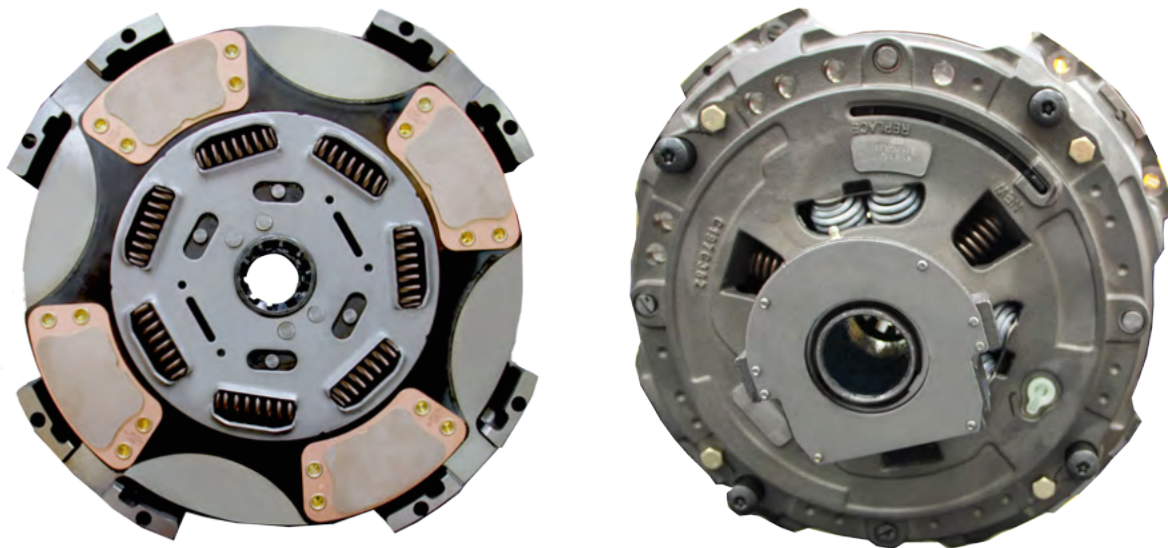

FEATURES & BENEFITS

- » Full round baffle for 360° of contamination protection. Others offer a low-height baffle or a seal which offer limited contamination protection
- » The ceramic facing material has a keystone profile rather than a flat profile. This offers smoother engagement and less aggressive flywheel wear
- » Two grease zerks in the release bearing for easy maintenance
- » TRP clutch warranty is 24 months with unlimited mileage on all Medium Duty and Heavy Duty clutches
- » All new components and castings for extended life

RELATED PARTS

- » Clutch Installation Kits
- » Transmissions
- » Pilot Bearings
- » Driveline Components

SELF ADJUSTING CLUTCHES

Protect your vehicle with TRP self adjusting clutches and avoid damage to components. The automatic adjustment keeps the clutch in alignment without the need for downtime to adjust the clutch. It is especially important to use self adjusting clutches on trucks equipped with hydraulic clutch linkage, because the hydraulic linkage removes the free play feeling so the driver can't tell when the clutch needs to be adjusted.

Self adjusting TRP Clutches are available in torque ratings from 1700 lb. ft. to 2050 lb. ft. The TRP self adjust clutch complements the manual adjust clutches already available.

POPULAR SELF ADJUSTING CLUTCHES

TRP	OE	Torque Rating	Springs	Disc Style	Disc Material
CL109601-20	309701-20	1860	7	6 Paddle	Ceramic
CL109601-25	309701-25	2050	7	6 Paddle	Ceramic
CL109601-82	309701-82	1700	7	4 Paddle	Ceramic

POPULAR MACK APPLICATIONS

TRP	OE	Torque Rating	Springs	Disc Style	Disc Material
CL109601-61	309701-51	1760	9	4 Paddle	Ceramic
CL109601-92	309701-91	1760	9	6 Paddle	Ceramic